

extrusion coating & laminating lines

SML
EXTRUSION LINES – ENGINEERED TO PERFORM ▶

▶ **FlexPack®**
FLEXIBLE PACKAGING



**Extrusion lines –
engineered to perform**

One concept that delivers numerous effects

The ingenious design of SML's FlexPack[®] coating and laminating line facilitates a wide variety of structures. It guarantees cost-effective and user-friendly operation while delivering extraordinary product qualities. The modular set-up even makes the subsequent positioning of a second laminator possible.

Key Features

- Reduced floor space requirements
- Good accessibility
- High quality components
- Best cost performance ratio
- Easy operation

Substrates	BOPP film, BOPET film, PA film, paper, aluminium foil, metallised film, barrier film, nonwovens, etc.
Extrusion materials	LDPE, PP, EAA, EMA, EVA, IONOMERS...
Coating weight	8 – 50 g/sqm (depending on the product)

Types	FlexPack[®] 1500	FlexPack[®] 1800
Product width	700 – 1,350 mm	800 – 1,650 mm
Max. mech. line speed	350 m/min	350 m/min
Max. mech. line speed, shaftless	450 m/min	450 m/min

EXTRUSION UNIT

- ▶ Extruder carriage with floor-level trackwork and 3-axis motorised movement
- ▶ Fully integrated extruder including a gravimetric batch dosing system (maximal of 6 components on each extruder)
- ▶ Extruder A: Ø 90/33 L/D
- ▶ Extruder B: Ø 60/33 L/D
- ▶ Third extruder optional
- ▶ Melt filter and melt pressure regulation valve
- ▶ 3-layer feedblock with a variable geometry (optional 5 layers)
- ▶ T-die with an internal deckling and edge bead reduction system
- ▶ Inline die splitter for easy die cleaning

COATING UNIT


- ▶ Chill roll, Ø 800 mm
- ▶ Rubberised pressing roll, Ø 200 mm
- ▶ Steel supporting roll, Ø 250 mm
- ▶ Separate cooling circuits for the chill roll and pressing unit
- ▶ Quick change equipment for rollers
- ▶ Stripper roll at chill roll outlet
- ▶ Electrically adjustable teflon belt attachment



No matter the preferences, SML has the ideal solution

SML's FlexPack® coating and laminating line is used for a wide range of applications – ranging from flexible packaging to textiles, from construction to the automotive industry.



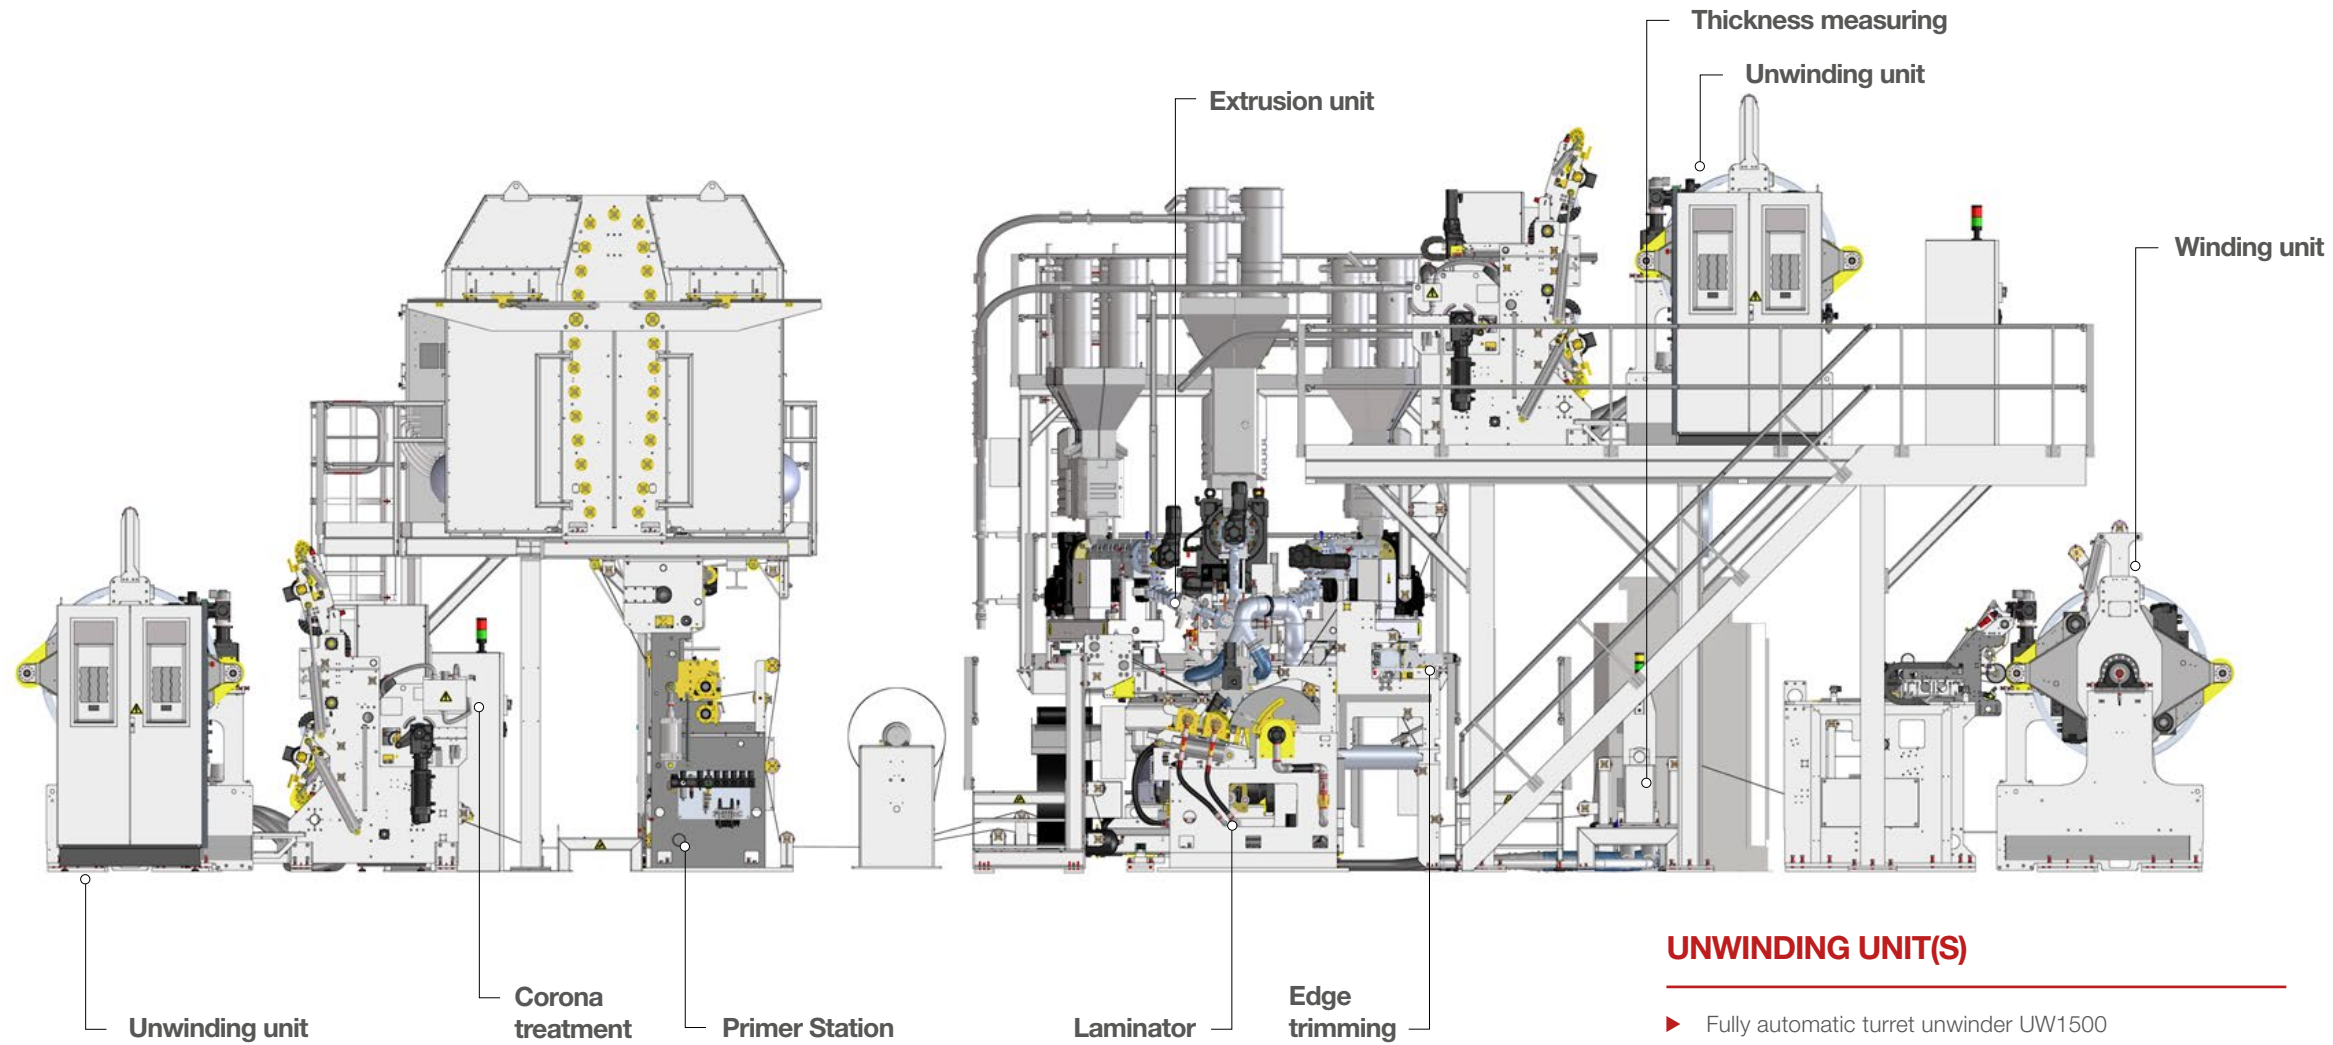

Dimensions:
 H 5.8 – 7 m
 L 15.5 – 24 m
 W 11.5 – 15 m

CORONA TREATMENT(S)

- ▶ Driven ceramic treatment roll with rubberised pressing roll
- ▶ Ceramic electrodes for the treatment of conductive and non-conductive substrates

THICKNESS MEASURING UNIT(S)

- ▶ Frame with a Beta gauge (other sensors optional)
- ▶ APC control optional

EDGE TRIM HANDLING

- ▶ Shear cut circular knife system with a driven counter knife
- ▶ Edge trim suction system with a blower, a venturi injector and sound absorber

WINDER

- ▶ Fully automatic turret winder W1500
- ▶ Both winding directions possible
- ▶ Max. winding diameter up to 1,270 mm
- ▶ Pull roll unit to separate the web tension from the winding tension
- ▶ Contact and gap winding mode
- ▶ Shafted or shaftless core clamping available

FIELD OF APPLICATIONS

- ▶ Flexible packaging
- ▶ Coated papers
- ▶ Technical applications (insulation, packing material,...)

IN COMBINATION WITH THE PATENTED „DOUBLECOAT“ PROCESS

- ▶ Breathable roofing membrane
- ▶ Products for hygienic applications
- ▶ Breathable textiles
- ▶ Protective wear

UNWINDING UNIT(S)

- ▶ Fully automatic turret unwinder UW1500
- ▶ Both unwinding directions possible
- ▶ Max. substrate diameter up to 1,270 mm
- ▶ Integrated edge guiding system
- ▶ Constant gap device for unwinding of thin foil
- ▶ Shafted or shaftless core clamping available

HOTMELT COATING MODULE (optional)

- ▶ Patented 'DoubleCoat' hotmelt lamination process
- ▶ Hotmelt tank melter
- ▶ Drum melter optional
- ▶ Flat die with motorised deckling system


OZONE TREATMENT (optional)

- ▶ Ozone generator
- ▶ Applicators for both side treatment of melt curtain

PRIMER UNIT (optional)

- ▶ Closed chamber doctor blade system for direct gravur coating
- ▶ Waterbased primers
- ▶ High efficiency hot air drying system with vertical dryer 2 x 2.5 m
- ▶ Quick change for sleeve type rubber pressing roll

LAMINATOR UNIT

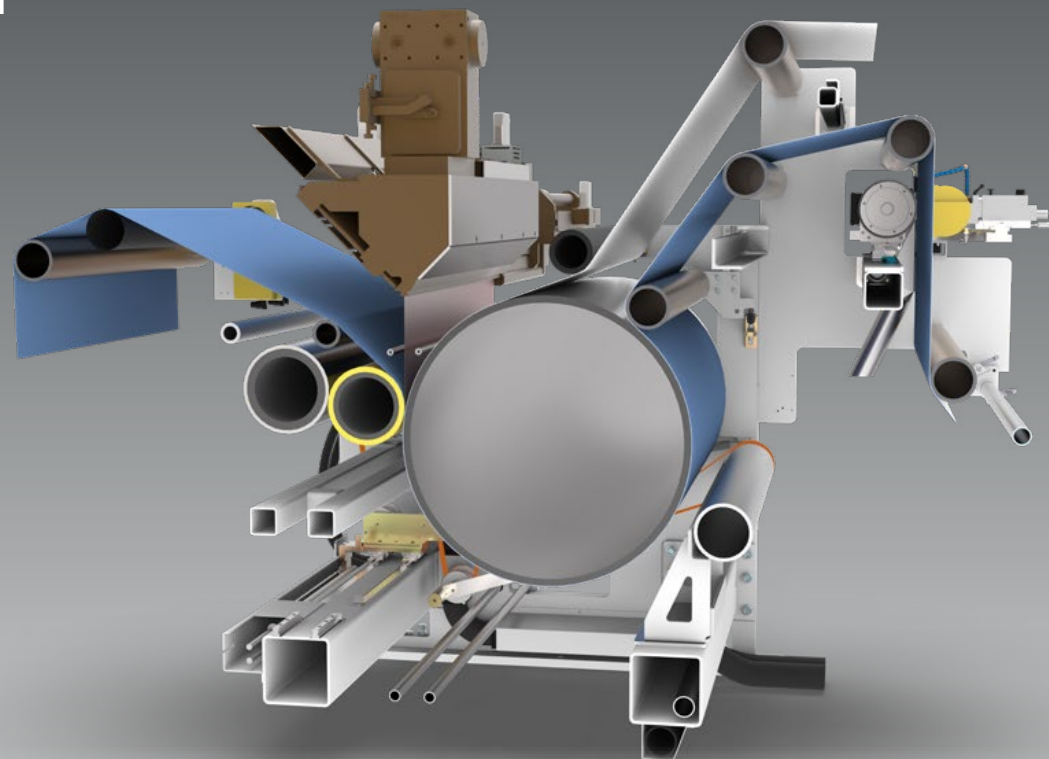

▶ **Take advantage
of our global
leadership in
extrusion
technology.**

**ANALYSES
DEVELOPMENT
PRE-TESTED PERFORMANCE
DELIVERY ON TIME
SERVICE SUPPORT
CUSTOMER SATISFACTION**

SML
EXTRUSION LINES – ENGINEERED TO PERFORM ▶

SML - Head Office

Gewerbepark Ost 32
4846 Redlham
Austria
Phone: +43 7673 90999
E-mail: sml@sml.at
www.sml.at

SML - Machinery Far East Sdn Bhd

(1029958-P)
1201 Block B, Menara Amcorp
No.18 Jalan Persiaran Barat
46050 Petaling Jaya
Selangor Darul Ehsan,
Selangor, Malaysia
Phone: +60 3 7955 9098
E-mail: yen@sml.at

SML - Moscow Office

Ogorodny proezd, 5
Building 3, office 408
127254 Moscow
Russia
Phone: +7 495 618 8007
E-mail: kna@sml.at

SML - Beijing Office

Unit 1410, Landmark Tower
No. 8 North Dongsanhuan Road
Chaoyang District
100004 Beijing, P.R. of China
Phone: +86 10 6590 0946
E-mail: sml@sml.bj.cn

SML - North America Service, Inc.

Suite 204
85 Eastern Avenue
Gloucester MA 01930
USA
Phone: +1 978 281 0560
Mobile: +1 978 394 1553
E-mail: jom@sml.at



www.sml.at